

## Effects of Slip and Heat Transfer on MHD Peristaltic Flow in An Inclined Asymmetric Channel

Kalidas Das

Department of Mathematics, Kalyani Government Engineering College,  
Kalyani, Nadia, West Bengal, Pin:741235, India

E-mail: kd\_kgec@rediffmail.com

**ABSTRACT.** Peristaltic transport of an incompressible electrically conducting viscous fluid in an inclined planar asymmetric channel is studied. The asymmetry is produced by choosing the peristaltic wave train on the walls to have different amplitude and phase. The closed form solutions of momentum and energy equation in presence of viscous dissipation term are obtained for long wave length and low Reynolds number approximations. The effects of different parameters entering into the problem are discussed numerically and explained graphically.

**Keywords:** Peristalsis, Froude number, Brinkman number, Heat transfer coefficient.

**2000 Mathematics subject classification:** 76A05, 76Z05.

### 1. INTRODUCTION

The term peristalsis is used for the mechanism by which a fluid can be transported through a distensible tube when progressive waves of area contraction and expansion propagate along its length. In physiology, peristalsis is an important mechanism for transport of fluid and is used by the body to propel or mix the contents of a tube as in ureter, gastrointestinal tract, bile duct and other glandular ducts. Some biomedical instruments, like the blood

pumps in dialysis and the heart lung machine use this principle. The mechanism of peristaltic transport has been exploited for industrial applications like sanitary fluid transport, transport of corrosive fluids where the contact of the fluid with the machinery parts is prohibited and transport of a toxic liquid is used in nuclear industry to avoid contamination from the outside environment. The problem of the mechanism of peristaltic transport has attracted the attention of many investigators since the first investigation of Latham [7]. A good number of analytical, numerical and experimental [1-3,5-8,11,13-15,17,21,25] studies has been conducted to understand peristaltic action under different conditions with reference to physiological and mechanical situations. Srinivas and Pushparaj [23] have investigated the peristaltic transport of MHD flow of a viscous incompressible fluid in a two dimensional asymmetric inclined channel. However, the interaction of peristalsis and heat transfer has not received much attention, which may become highly relevant and significant in several industrial processes. Also, thermodynamic aspects of blood may become significant in processes like oxygenation and hemodialysis [9,18,19,22,24] when blood is drawn out of the body. Lately, the combined effects of magnetohydrodynamics and heat transfer on the peristaltic transport of viscous fluid in a channel with compliant walls have been discussed by Mekheimer and Abd elmaboud and co-workers [10,16,20]. Very recently, Hayat et al.[4] have expanded the domain of the problem by considering slip conditions on the boundary of the channel; but they have neglected the viscous dissipation term in the energy equation. In fact, a limited attention has been given to the study of peristaltic flow in an inclined asymmetric channel, which is more practical in real field.

The aim of the present investigation is to highlight the importance of heat transfer analysis of MHD peristaltic flow in an asymmetric inclined channel under the influence of slip conditions. The governing equations of momentum and energy have been simplified using long wave length and low Reynolds number approximations. The exact solutions of momentum and energy equations in presence of viscous dissipation term and external heat addition/absorption have been obtained. The features of flow and heat transfer characteristics are analyzed by plotting graphs. In the present paper the Section 2 deals with the formulation of the problems; Section 3 contains the closed form solutions of stream function, temperature, pressure gradient and heat transfer coefficient; numerical results and discussion are presented in Section 4; the conclusions have been summarized in section 5.

## 2. MATHEMATICAL FORMULATION OF THE PROBLEM

MHD flow of an electrically conducting incompressible viscous fluid is considered in a two dimensional asymmetric channel in presence of a constant

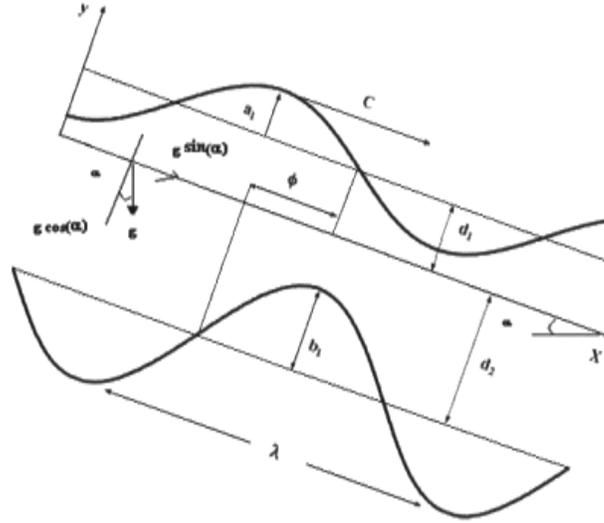


FIGURE 1. Schematic diagram of the physical model

transverse magnetic field  $B_0$  ( see Fig.1). The channel flow occurs due to different amplitude and phases of the peristaltic waves with constant speed  $c$  along the channel walls

$$\begin{aligned} Y = H_1 &= d_1 + a_1 \cos \frac{2\pi}{\lambda}(X - ct), \text{ upper wall} \\ Y = H_2 &= -d_2 - b_1 \cos \left( \frac{2\pi}{\lambda}(X - ct) + \phi \right), \text{ lower wall} \end{aligned} \quad (1)$$

where  $a_1$  and  $b_1$  are the amplitudes of the waves,  $\lambda$  is the wave length,  $d_1 + d_2$  is the width of the channel,  $t$  is the time and  $X$  is the direction of wave propagation. The phase difference  $\phi$  varies in the range  $0 \leq \phi \leq \pi$ , in which  $\phi = 0$  corresponds to symmetric channel with waves out of phase and  $\phi = \pi$  the waves are in phase and  $a_1, b_1, d_1, d_2$  and  $\phi$  satisfies the condition

$$a_1^2 + b_1^2 + 2a_1b_1 \cos \phi \leq (d_1 + d_2)^2 \quad (2)$$

The lower wall of the channel is maintained at temperature  $T_1$  while the upper wall has temperature  $T_0$

The equations governing the motion for the present problem are

$$\frac{\partial U}{\partial X} + \frac{\partial V}{\partial Y} = 0, \quad (3)$$

$$\rho \left[ \frac{\partial U}{\partial t} + U \frac{\partial U}{\partial X} + V \frac{\partial U}{\partial Y} \right] = -\frac{\partial P}{\partial X} + \mu \left( \frac{\partial^2 U}{\partial X^2} + \frac{\partial^2 U}{\partial Y^2} \right) - \sigma B_0^2 U + \rho g \sin \alpha, \quad (4)$$

$$\rho \left[ \frac{\partial V}{\partial t} + U \frac{\partial V}{\partial X} + V \frac{\partial V}{\partial Y} \right] = -\frac{\partial P}{\partial Y} + \mu \left( \frac{\partial^2 V}{\partial X^2} + \frac{\partial^2 V}{\partial Y^2} \right) - \rho g \cos \alpha, \quad (5)$$

$$C_p \left[ \frac{\partial T}{\partial t} + U \frac{\partial T}{\partial X} + V \frac{\partial T}{\partial Y} \right] = \frac{\kappa}{\rho} \left( \frac{\partial^2 T}{\partial X^2} + \frac{\partial^2 T}{\partial Y^2} \right) + Q_0 + \nu \left[ 2 \left( \frac{\partial U}{\partial X} \right)^2 + 2 \left( \frac{\partial V}{\partial Y} \right)^2 + \left( \frac{\partial U}{\partial Y} + \frac{\partial V}{\partial X} \right)^2 \right] \quad (6)$$

where  $U, V$  are the velocities in the  $X$  and  $Y$  directions in the fixed frame,  $\alpha$  is inclination of the channel with the horizontal,  $P$  is the pressure,  $\rho$  is the density,  $\mu$  is the coefficient of viscosity of fluid,  $\nu$  is the kinematic coefficient of viscosity,  $\sigma$  is the electrical conductivity of the fluid,  $\kappa$  is the thermal conductivity,  $C_p$  is the specific heat at constant pressure,  $Q_0$  is the constant heat addition/absorption,  $g$  is the acceleration due to gravity and  $T$  is the temperature of the fluid.

A wave frame  $(x, y)$  is now introduced, moving with velocity  $c$  away from the fixed frame  $(X, Y)$  by the transformation

$$x = X - ct, y = Y, u = U - c, v = V, p(x) = P(X, t) \quad (7)$$

where  $u, v$  are the velocities in the  $x$  and  $y$  directions in the wave frame and  $p$  is the pressure in wave frame.

Introducing the following non-dimensional quantities :

$$\begin{aligned} \bar{x} &= \frac{x}{\lambda}; \bar{y} = \frac{y}{d_1}; \bar{u} = \frac{u}{c}; \bar{v} = \frac{v}{c\delta}; \delta = \frac{d_1}{\lambda}; \bar{p} = \frac{d_1^2 p}{c\mu\lambda}; h_1 = \frac{H_1}{d_1}; h_2 = \frac{H_2}{d_1}; d = \frac{d_1}{d_2}; \\ a &= \frac{a_1}{d_1}; b = \frac{b_1}{d_1}; R = \frac{cd_1}{\nu}; \theta = \frac{T-T_0}{T_1-T_0}; P_r = \frac{\rho\nu C_p}{\kappa}; \bar{t} = \frac{ct}{\lambda}; M = \sqrt{\frac{\sigma}{\mu}} B_0 d_1; \\ \beta &= \frac{Q_0 d_1^2}{(T_1-T_0)\nu C_p}; E_c = \frac{c^2}{C_p(T_1-T_0)}; F_r = \frac{c^2}{g d_1} \end{aligned} \quad (8)$$

in (3)-(6), we finally get (after dropping bars)

$$\delta \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0, \quad (9)$$

$$\delta R \left[ (u+1) \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} \right] = -\frac{\partial p}{\partial x} + \left( \delta^2 \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} \right) - M^2 (u+1) + \frac{R}{F_r} \sin\alpha, \quad (10)$$

$$\delta^3 R \left[ (u+1) \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} \right] = -\frac{\partial p}{\partial y} + \delta^2 \left( \delta^2 \frac{\partial^2 v}{\partial x^2} + \frac{\partial^2 v}{\partial y^2} \right) - \delta \frac{R}{F_r} \cos\alpha, \quad (11)$$

$$\delta R \left[ (u+1) \frac{\partial \theta}{\partial x} + v \frac{\partial \theta}{\partial y} \right] = \frac{1}{P_r} \left( \delta^2 \frac{\partial^2 \theta}{\partial x^2} + \frac{\partial^2 \theta}{\partial y^2} \right) + \beta + E_c \left[ 2\delta^2 \left( \frac{\partial u}{\partial x} \right)^2 + 2\delta^2 \left( \frac{\partial v}{\partial y} \right)^2 + \left( \frac{\partial u}{\partial y} + \delta^2 \frac{\partial v}{\partial x} \right)^2 \right] \quad (12)$$

where  $R$  is the Reynolds number,  $\delta$  is the wave number,  $M$  is the Hartmann number,  $P_r$  is the Prandtl number,  $E_c$  is the Eckert number,  $F_r$  is the Froude number and  $\beta$  is the non-dimensional heat source/sink parameter.

Introducing stream function  $\psi$  such that  $u = \frac{\partial \psi}{\partial y}$ ,  $v = -\frac{\partial \psi}{\partial x}$ , applying long wave length approximation and neglecting the wave number along with low-Reynolds numbers, one can find from (9)-(12) that

$$0 = -\frac{\partial p}{\partial x} + \frac{\partial^3 \psi}{\partial y^3} - M^2 \left( \frac{\partial \psi}{\partial y} + 1 \right) + \frac{R}{F_r} \sin\alpha, \quad (13)$$

$$0 = -\frac{\partial p}{\partial y}, \quad (14)$$

$$0 = \frac{1}{P_r} \frac{\partial^2 \theta}{\partial y^2} + \beta + E_c \left( \frac{\partial^2 \psi}{\partial y^2} \right)^2 \quad (15)$$

Considering slip on the wall corresponding boundary conditions for the present problem in the wave frame can be written as

$$\begin{aligned} \psi &= \frac{F}{2}, \frac{\partial \psi}{\partial y} + \beta_1 \frac{\partial^2 \psi}{\partial y^2} = -1, \text{ at } y = h_1 = 1 + a \cos 2\pi x, \\ \psi &= -\frac{F}{2}, \frac{\partial \psi}{\partial y} - \beta_1 \frac{\partial^2 \psi}{\partial y^2} = -1, \text{ at } y = h_2 = -d - b \cos(2\pi x + \phi), \end{aligned} \quad (16)$$

$$\begin{aligned} \theta + \gamma \frac{\partial \theta}{\partial y} &= 0, \text{ at } y = h_1, \\ \theta - \gamma \frac{\partial \theta}{\partial y} &= 1, \text{ at } y = h_2 \end{aligned} \quad (17)$$

where  $\beta_1$  is the non-dimensional slip velocity parameter (Knudsen number) and  $\gamma$  is the non-dimensional thermal slip parameter,  $F = \int_{h_2}^{h_1} \frac{\partial \psi}{\partial y} dy$  is the flux in the wave frame and  $a, b, \phi$  and  $d$  satisfy the relation

$$a^2 + b^2 + 2ab \cos \phi \leq (1 + d)^2 \quad (18)$$

### 3. SOLUTION OF THE PROBLEM

Eq.(14) shows that  $p$  is not a function of  $y$ . On differentiating Eq.(13) with respect to  $y$ , the compatibility equation is as follows

$$\frac{\partial^4 \psi}{\partial y^4} - M^2 \frac{\partial^2 \psi}{\partial y^2} = 0 \quad (19)$$

The closed form solutions for Eqs.(19) and (15) with boundary conditions (16) and (17) are

$$\psi = A_0 + A_1 y + A_2 \cosh My + A_3 \sinh My, \quad (20)$$

$$\begin{aligned} \theta &= A_4 + A_5 y - \frac{1}{2} \beta P_r y^2 - \frac{1}{8} B_r M^2 \times \\ &\quad \{ 2M^2 y^2 (A_2^2 - A_3^2) + (A_2^2 + A_3^2) \cosh 2My + 2A_2 A_3 \sinh 2My \} \end{aligned} \quad (21)$$

where  $B_r (= E_c P_r)$  is the Brinkman number,

$$A_0 = -\frac{h_1 + h_2}{2} A_1, \quad (22)$$

$$A_1 = \frac{MF + (2 + F\beta_1 M^2) \tanh \frac{1}{2} M(h_1 - h_2)}{M(h_1 - h_2) - \{2 - \beta_1 M^2 (h_1 - h_2)\} \tanh \frac{1}{2} M(h_1 - h_2)}, \quad (23)$$

$$A_2 = \frac{(F+h_1-h_2)\operatorname{sech}\frac{1}{2}M(h_1-h_2)\sinh\frac{1}{2}M(h_1+h_2)}{M(h_1-h_2)-\{2-\beta_1M^2(h_1-h_2)\}\tanh\frac{1}{2}M(h_1-h_2)}, \quad (24)$$

$$A_3 = -A_2\coth\frac{1}{2}M(h_1+h_2) \quad (25)$$

$$A_4 = \frac{1}{4}\beta Pr h_1(h_1+2\gamma)\{2+B_rM^4(A_2^2-A_3^2)\} + \frac{1}{8}B_rM^2\{(A_2^2+A_3^2)(\cosh 2Mh_1+2\gamma M\sinh 2Mh_1)+2A_2A_3(\sinh 2Mh_1+2\gamma M\cosh 2Mh_1)\}-A_5(h_1+\gamma) \quad (26)$$

$$A_5 = -\frac{1}{h_1-h_2+2\gamma} + \frac{1}{4}B_rM^4(A_2^2-A_3^2)(h_1+h_2) + \frac{B_rM^2}{4(h_1-h_2+2\gamma)}\{(A_2^2+A_3^2)\sinh M(h_1+h_2)+2A_2A_3\cosh M(h_1+h_2)\}\{\sinh M(h_1-h_2)+2\gamma M\cosh M(h_1-h_2)\} \quad (27)$$

The pressure gradient is obtained from the dimensionless momentum equation for the axial velocity as

$$\frac{dp}{dx} = \frac{M^3(h_2-h_1-F)\{1+M\beta_1\tanh\frac{1}{2}M(h_1-h_2)\}}{M(h_1-h_2)-\{2-\beta_1M^2(h_1-h_2)\}\tanh\frac{1}{2}M(h_1-h_2)} + \frac{R}{Fr}\sin\alpha \quad (28)$$

The heat transfer coefficient ( $Z$ ) at the upper wall is given by

$$Z = (h_1)_x\theta_y = (h_1)_x[A_4 - \beta Pr y - \frac{1}{4}B_rM^3\{2My(A_2^2 - A_3^2) + (A_2^2 + A_3^2)\sinh 2My + 2A_2A_3\cosh 2My\}] \quad (29)$$

Note that if the inclination angle  $\alpha$  and the Eckert number  $E_c$  are taken equal to zero, the results of the problem reduce exactly to the same as that found by Hayat [25] whose results are in agreement with the previous results obtained Hayat [14] and Srinivas [24].

#### 4. NUMERICAL RESULTS AND DISCUSSION

An interesting phenomenon of peristaltic motion in the wave frame is trapping which is basically the formation of an internally circulating bolus of fluid by closed streamlines. This trapped bolus is pushed ahead with the peristaltic wave. The variations of  $\phi$ ,  $M$  and  $\beta_1$  on the streamlines are shown in Fig.2-4, respectively. It is observed from Fig.2 that the bolus appears in the center region for  $\phi=0$  and moves towards right and decreases in size as  $\phi$  increases. Fig.3 depicts that the size and number of trapped bolus decreases by increasing  $M$  and slowly disappears for large values of  $M$ . The effect of the slip parameter on the trapping is illustrated in Fig.4 and it is observed that the number and size of trapped bolus gradually decreases with increasing slip velocity parameter.

To study the behavior of the distributions of the axial velocity ( $u$ ), numerical calculations for several values of  $\phi$ ,  $M$  and  $\beta_1$  are carried out in Figs.5-7. The influence of  $\phi$  is shown in Fig.5 and it is observed that the axial velocity decreases in magnitude with an increase in the phase angle  $\phi$ . Fig.6 displays that with an increase in  $M$ , the magnitude of velocity decreases but it has no effect in the central region of the channel. Fig.7 shows that an increase in  $\beta_1$  results in increase in velocity distribution.

Figs.8-10 are prepared to discuss the pressure gradient for different values of  $M$ ,  $F_r$  and  $\beta_1$ . It can be noticed that in the wider portion of the channel  $x \in [0,0.3]$  and  $[0.6,1]$ , the pressure gradient is relatively small, that is, the flow can easily pass without imposition of a large pressure gradient. On the other hand, in a narrow part of the channel  $x \in [0.3,0.6]$  a much pressure gradient is required to maintain the same flux to pass it especially near  $x = 4.3$ . From Figs. 8,9, it may be noted that  $M$  increases the maximum amplitude of  $\frac{\partial p}{\partial x}$  and it rapidly increases for large magnetic field. But the amplitude decreases on increasing  $F_r$ . Fig.10 reveals that the pressure gradient decreases with increase in  $\beta_1$ .

To explicitly see the effects of various parameters, say  $\gamma$ ,  $M$  and  $B_r$  on temperature, Eq.(21) has been numerically evaluated and the results are presented in Figs.11-13. It is observed that the temperature increases with increase of  $\gamma$ ,  $B_r$  while it decreases with increasing  $M$ . Further, it can be noted that the temperature at the lower wall is maximum and it decreases slowly toward the upper wall.

Variations of the heat transfer coefficient at the wall have been presented in Figs.14-16 for various values of  $\gamma$ ,  $\beta$  and  $B_r$  with fixed values of other parameters. One can observe that the heat transfer coefficient decreases with increasing in  $\gamma$ ,  $\beta$ . Also, it is noted that there is no quantitative change in the behaviour of the heat transfer coefficient near the center but it increases with increasing  $B_r$  in the vicinity of the upper wall.

## 5. CONCLUSIONS

In this work, the combined effects of slip condition and heat transfer on MHD peristaltic flow of a viscous incompressible fluid in an asymmetric inclined channel are derived. The closed form analytical solutions of the problem under long wavelength and low Reynolds number approximations are obtained. Streamlines are plotted to discuss the phenomena of trapping. Some deductions are made and results are found to be in agreement with the earlier works. The main findings can be summarized as :

- (i) The number and volume of the trapped bolus decreases by increasing both the slip velocity parameter  $\beta_1$ . Moreover, trapped bolus moves towards right and decreases in size as  $\phi$  increases.
- (ii) The magnitude of axial velocity increases with increase in the slip velocity parameter  $\beta_1$  and decreases by increasing  $\phi$  and  $M$ .
- (iii) The pressure rise for a magnetohydrodynamic fluid is smaller due to slip condition and is maximum in the absence of the slip flow.
- (iv) It is analyzed that with increase in  $M$  temperature profile decreases; moreover, it is seen that temperature field increases with increasing in  $\gamma$  and  $B_r$ .
- (v) The rate of heat transfer drops due to the presence of the thermal slip condition, which is very important from the practical point of view.

**Acknowledgment.** The author wishes to express his sincere thanks to the honorable referees for their valuable comments and suggestions which led to definite improvement of the paper.

#### REFERENCES

- [1] N. Ali, Y. Wang, T. Hayat and M. Oberlack, Long wavelength approximation to peristaltic flow of an Oldroyd 4-constant fluid in a planar channel, *Biorheology*, **45**, (2008), 611-628.
- [2] MH. Haroun, Effect of Deborah number and phase difference peristaltic transport of a third order fluid in an asymmetric channel, *Commun. Nonlinear Sci. Number. Simul.*, **12**, (2007), 1464-1480.
- [3] MH. Haroun, Non-linear peristaltic flow of a fourth grade fluid in an inclined asymmetric channel, *Comput. Mater. Sci.*, **39**, (2007), 324-333.
- [4] T. Hayat, S. Hina and N. Ali, Simultaneous effects of slip and heat transfer on the peristaltic flow, *Commun. Nonlinear Sci. Number. Simul.*, **15**, (2010), 1526-1537.
- [5] T. Hayat, Q. Hussain and N. Ali, Influence of partial slip on the peristaltic flow in a porous medium, *Phys. Lett. A*, **182**, (2008), 3399-3409.
- [6] T. Hayat, Y. Wang, AM. Siddiqui and K. Asghar, Peristaltic transport of a third order fluid in a circular tube, *Math. Models Methods Appl. Sci.*, **12**, (2002), 1691-1706.
- [7] B. Jazbi, M. Moini, Application of Hes homotopy perturbation method for Schrodinger equation, *Iranian Journal of Mathematical Sciences and Informatics*, **3(2)**, (2008), 13-19.
- [8] M. Kothandapani, S. Srinivas, Peristaltic transport of a Jeffrey fluid under the effect of magnetic field in an asymmetric channel, *Int J Nonlinear Mech.*, **43**, (2008), 915-924.
- [9] M. Kothandapani, S. Srinivas, Peristaltic transport in an asymmetric channel with heat transfer-a note, *Int. Commun. Heat Mass Transfer*, **35**, (2008), 514-522.
- [10] M. Kothandapani, S. Srinivas, On the influence of wall properties in the MHD peristaltic transport with heat transfer and porous medium, *Phys. Lett. A*, **372**, (2008), 4586-4591.
- [11] R. Kumara, G. Partapb, Axisymmetric Vibrations in Micropolar Thermoelastic Cubic Crystal Plate Bordered with Layers or Half Spaces of Inviscid liquid, *Iranian Journal of Mathematical Sciences and Informatics*, **4(2)**, (2009), 55-77.
- [12] TW. Latham, *Fluid motion in peristaltic pump*, S. M. Thesis, MIT, 1966.
- [13] S. Kh. Mekheimer, Peristaltic flow of blood under the effect of magnetic field in a non uniform channel, *Appl. Math. Comput.*, **153**, (2004), 763-777.

- [14] S. Kh. Mekheimer, Effect of the induced magnetic field on Peristaltic flow of a couple stress fluid, *Phys. Lett. A*, **372**, (2008), 4271-4278.
- [15] S. Kh. Mekheimer, Y. Abd elmaboud, Peristaltic flow of a couple stress fluid in an annulus: application of an endoscope, *Physica A*, **387**, (2008), 2403-2415.
- [16] S. Kh. Mekheimer, Y. Abd elmaboud, The influence of heat transfer and magnetic field on peristaltic transport of a Newtonian fluid in a vertical annulus: application of an endoscope, *Phys. Lett. A*, **372**, (2008), 1657-1665.
- [17] M. Mishra, AR. Rao, Peristaltic transport of a Newtonian fluid in an asymmetric channel, *Z. Angew Math. Phys.*, **54**, (2004), 440-532.
- [18] S. Nadeem, N. S. Akbar, Influence of heat transfer on a peristaltic flow of Johnson Segalman fluid in a non uniform tube, *Int. Commun. Heat Mass Transfer.*, **36**, (2009), 1050-1059.
- [19] S. Nadeem, N. S. Akbar, Influence of heat transfer on a peristaltic transport of Herschel Bulkley fluid in a non-uniform inclined tube, *Commun. Nonlinear Sci. Numer. Simulat.*, **14**, (2009), 4100-4113.
- [20] S. Nadeem, N. S. Akbar, Effects of heat transfer on the peristaltic transport of MHD Newtonian fluid with variable viscosity: Application of Adomian decomposition method, *Commun Nonlinear Sci Numer Simulat.*, **14**, (2009), 3844-3855.
- [21] S. Nadeem, N. S. Akbar, Effects of temperature dependent viscosity on peristaltic flow of a Jeffrey-six constant fluid in a non-uniform vertical tube, *Commun. Nonlinear Sci. Numer. Simul.*, **15**, (2010), 3950-3964.
- [22] G. Radhakrishnamacharya, Ch. Srinivasulu, Influence of wall properties on peristaltic transport with heat transfer, *CR Mecanique*, **335**, (2007), 369-373.
- [23] S. Srinivas, V. Pushparaj, Non-linear peristaltic transport in an inclined asymmetric channel, *Commun. Nonlinear Sci. Numer Simul.*, **13**, (2008), 1782-1795.
- [24] K. Vajravelu, G. Radhakrishnamacharya and V. Radhakrishnamurty, Peristaltic flow and heat transfer in a vertical porous annulus with long wavelength approximation, *Int. J. Nonlinear Mech.*, **42**, (2007), 754-759.
- [25] Y. Wang, T. Hayat and K. Hutter, Peristaltic flow of a Johnson-Segalman fluid through a deformable tube, *Theoret. Comput. Fluid Dyn.*, **21**, (2007), 369-380

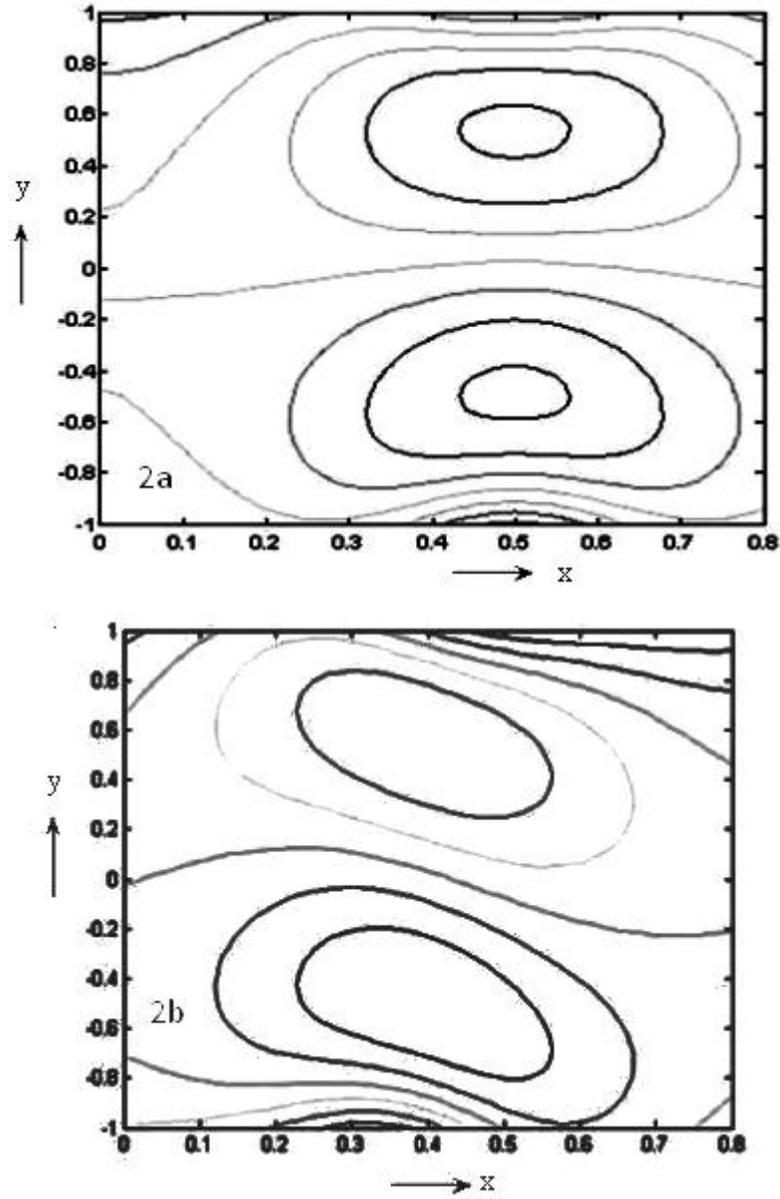


FIGURE 2. Effect of  $\phi$  on streamlines : (a) $\phi=0$ , (b) $\phi=\pi/3$ :  
 $a=0.25$ ,  $b=0.4$ ,  $d=1.1$ ,  $M=0.5$ ,  $\beta_1 = 0.01$

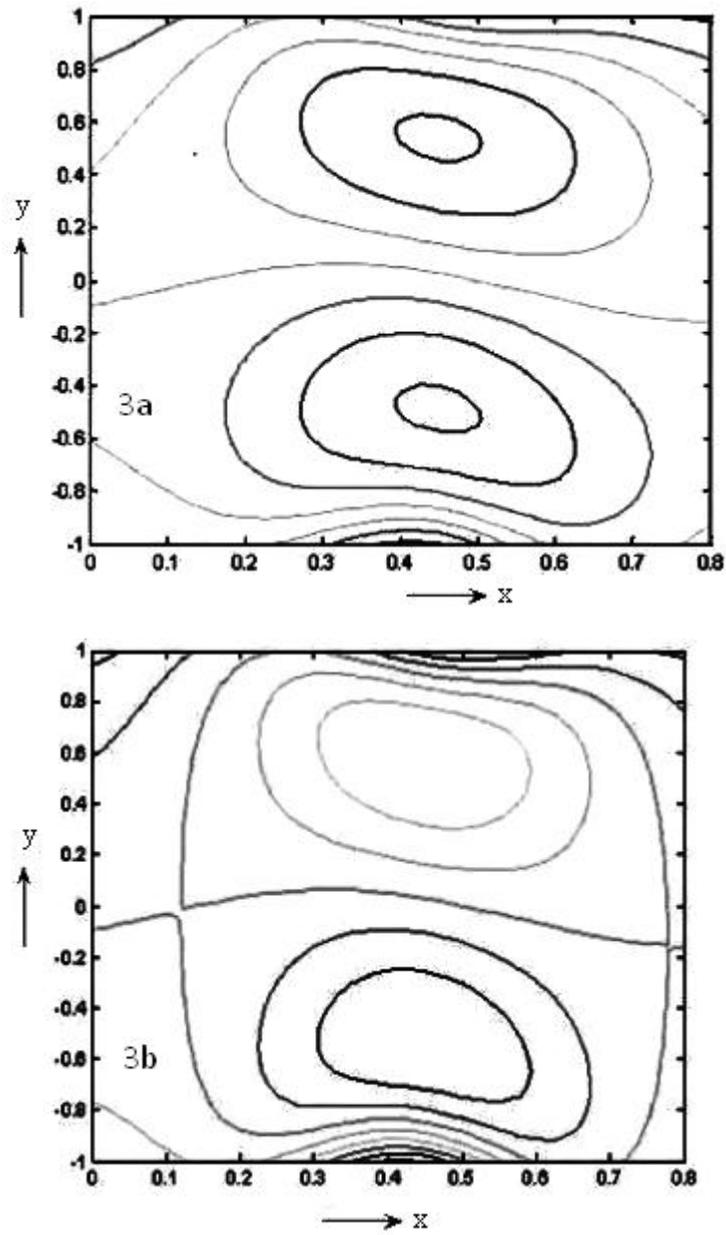


FIGURE 3. Effect of  $M$  on streamlines: (a)  $M=0.05$ , (b)  $M=1.5$   
:  $a=0.25$ ,  $b=0.4$ ,  $d=1.1$ ,  $\phi=\pi/6$ ,  $\beta_1=0.01$

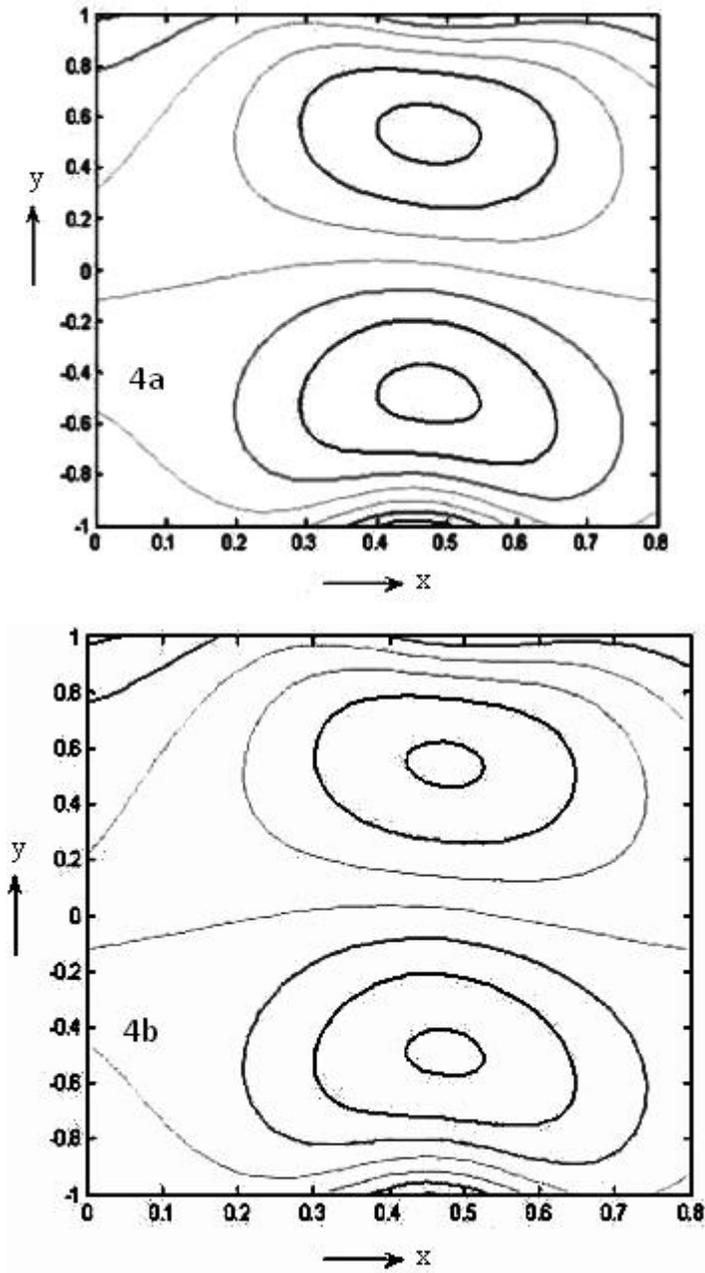


FIGURE 4. Effect of  $\beta_1$  on streamlines: (a)  $\beta_1=0.001$ ,  
 (b)  $\beta_1=0.04$  :  $a=0.25$ ,  $b=0.4$ ,  $d=1.1$ ,  $M=0.5$ ,  $\phi=\pi/12$

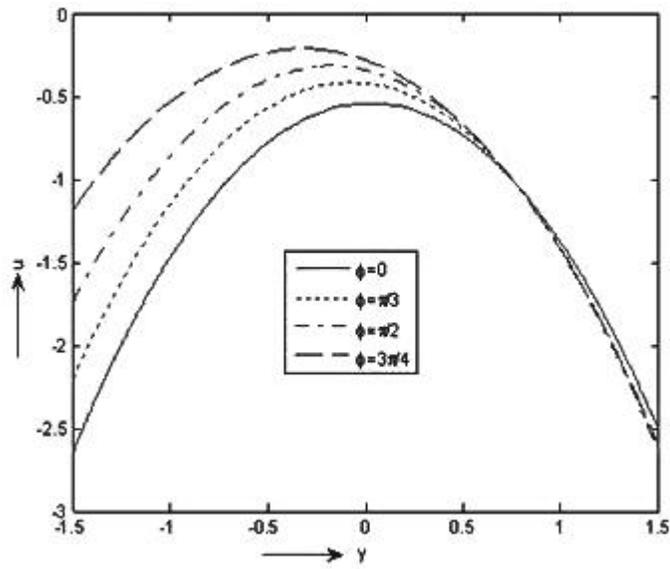


FIGURE 5. Velocity distribution for different values of  $\phi$ :  
 $a=0.25, b=0.4, d=1.1, x=0.5$

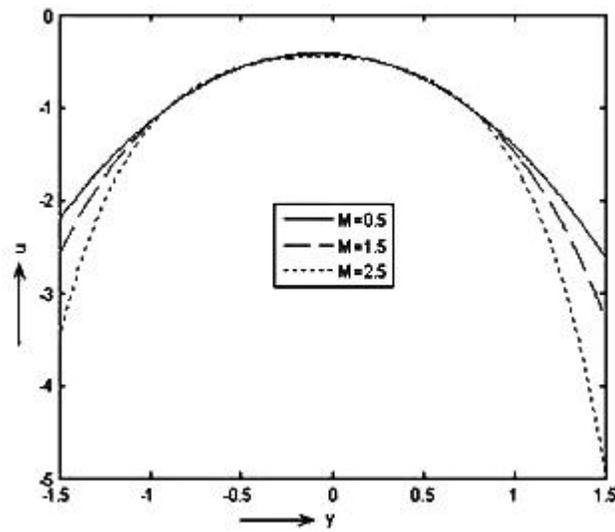


FIGURE 6. Velocity distribution for different values of  $M$ :  
 $a=0.25, b=0.4, d=1.1, x=0.5$

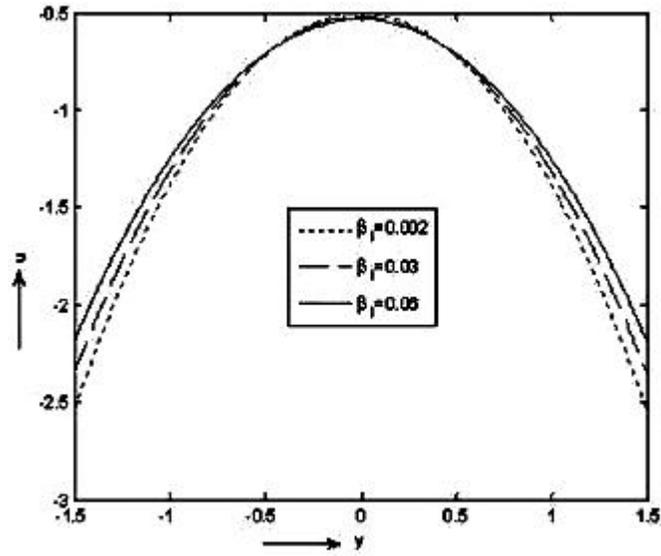


FIGURE 7. Velocity distribution for different values of  $\beta_1$ :  $a=0.25, b=0.4, d=1.1, x=0.5$

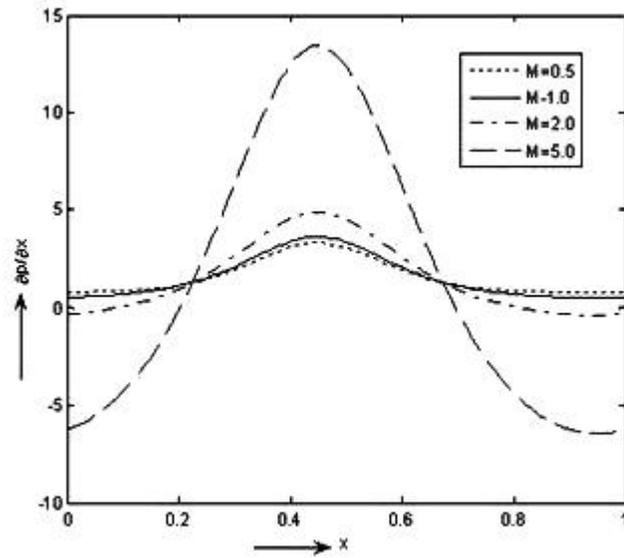


FIGURE 8. Variation of the pressure gradient with  $x$  for different values of  $M$ :  $a=0.25, b=0.4, d=1.1$

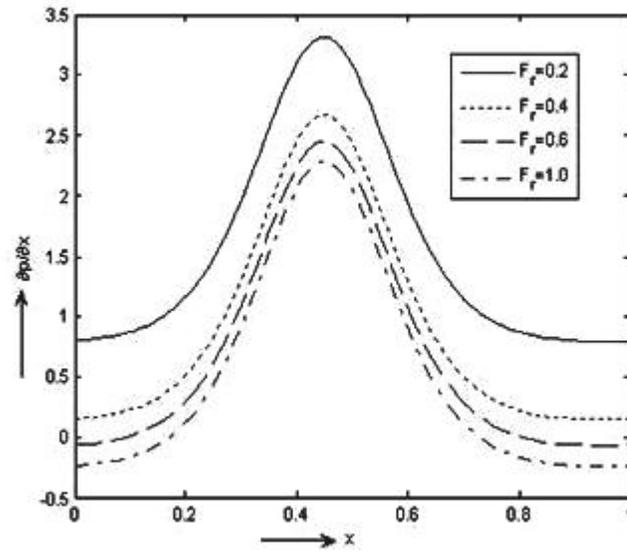


FIGURE 9. Variation of the pressure gradient with  $x$  for different values of  $F_r$ :  $a=0.25, b=0.4, d=1.1$

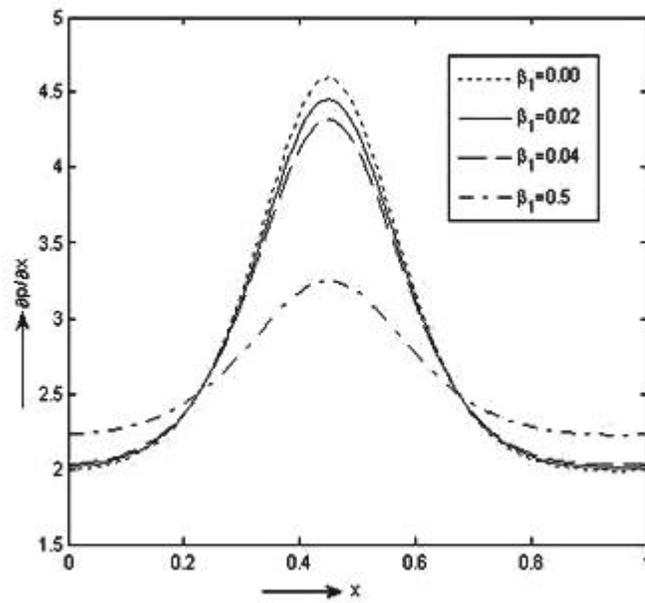


FIGURE 10. Variation of the pressure gradient with  $x$  for different values of  $\beta_1$ :  $a=0.25, b=0.4, d=1.1$

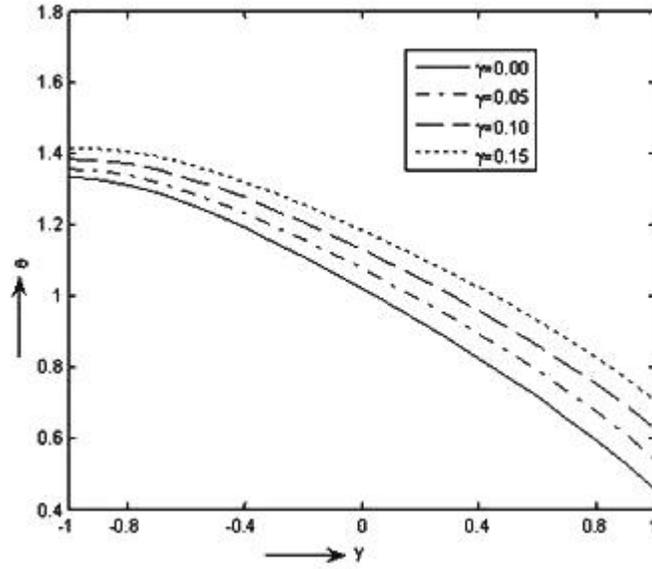


FIGURE 11. Variation of temperature with  $y$  for different values of  $\gamma$ :  $a=0.25$ ,  $b=0.4$ ,  $d=1.1$ ,  $x=0.5$

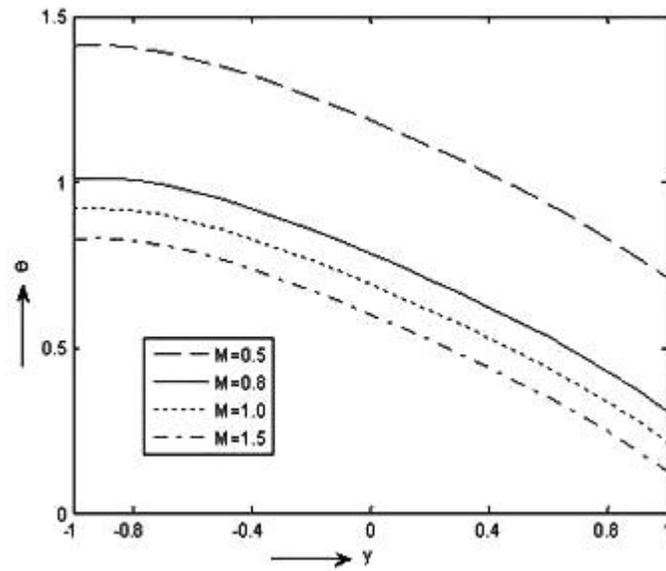


FIGURE 12. Variation of temperature with  $y$  for different values of  $M$ :  $a=0.25$ ,  $b=0.4$ ,  $d=1.1$ ,  $x=0.5$

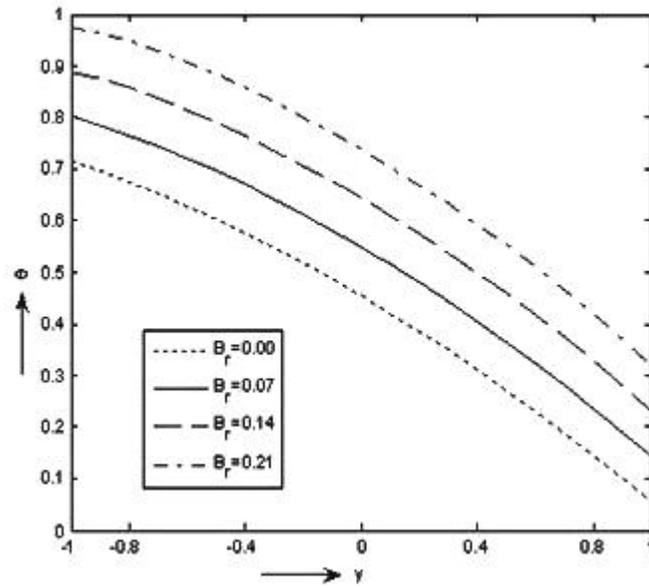


FIGURE 13. Variation of temperature with  $y$  for different values of  $B_r$ :  $a=0.25$ ,  $b=0.4$ ,  $d=1.1$ ,  $x=0.5$

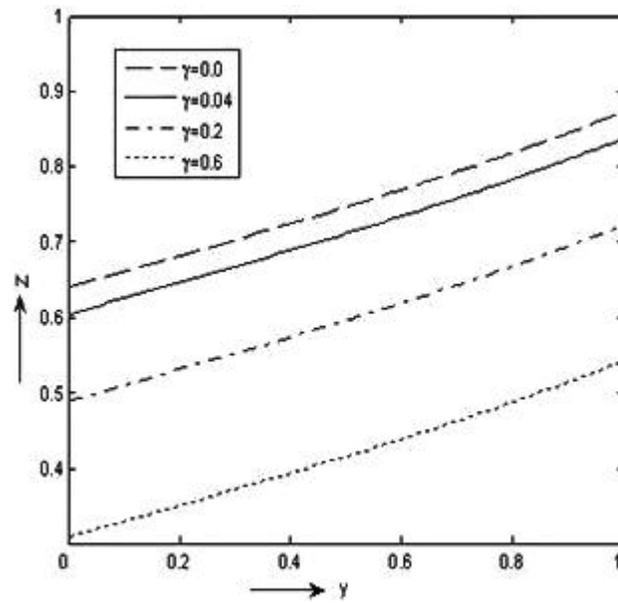
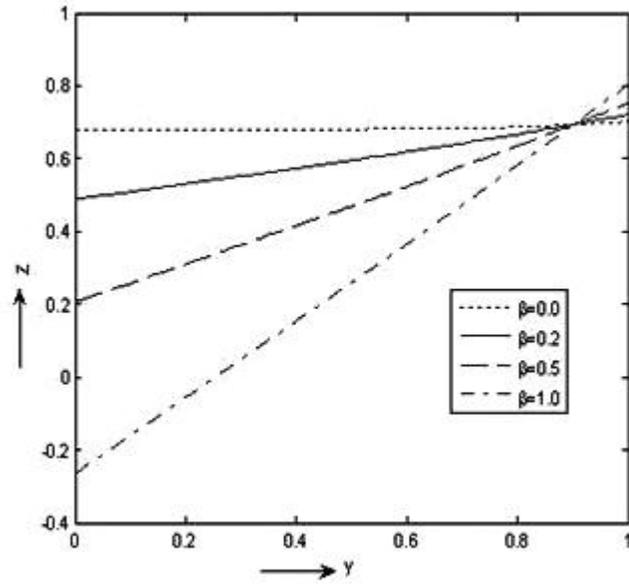
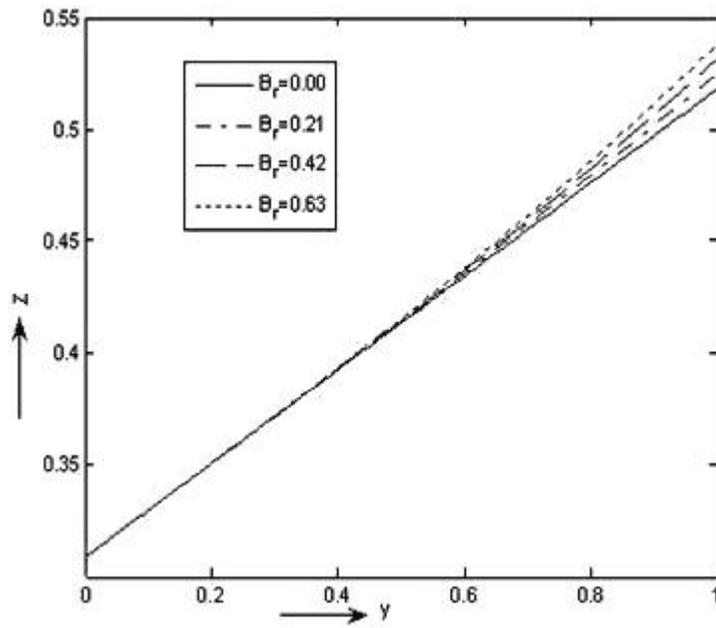


FIGURE 14. Effect of  $\gamma$  on heat transfer coefficient

FIGURE 15. Effect of  $\beta$  on heat transfer coefficientFIGURE 16. Effect of  $B_r$  on heat transfer coefficient